

Building Chemistry Industry , Dammam, Kingdom of Saudi Arabia

Method statement for BC AR Polyol (BCI Aromatic Polyol)

System Guide

BC Epoxy primer 349 , High performance epoxy primer

BC AR Polyol , Pure elastomeric polyurea membrane

Prepared and submitted by Building chemistry Industry

Technical background

Problem

Water seepage and penetration occur from top layer of open area built with decorative paver block tiles, causing damage to the floor area and water pooling in surrounding

Corrective action

Remedial measures to arrest water leakage and protect the area from further damage is described in In this submittal and repair procedure



Table of Contents

1. Scope of Work.....	3
2. Access/Egress.....	3
3. Lighting	3
4. Plant & Equipment	3
5. Materials.....	4
6. Sequence/Method of work.....	4
7. Program	6
8. Risks and Controls.....	6
9. Training	8

10. Supervision.....	9
11. Supervisor.....	9
B. QC Inspector.....	9
12. Working Hours	10
13. Housekeeping	10
14. Other Information.....	10

Scope of works: Supply and application of BC AR polyurea system

Given below are the steps followed in this repair project n

- 1.Complete removal of all the tiles
- 2.Removing old water proofing material and dispose them according to standard operating procedures and as per Safety Procedures applicable
- 3.Enclose the work site with suitable protective fencing , in order to isolate the place and prevent adjoining areas getting affected
- 4.Check and inspect concrete surface for cracks , damages and any other defects and repair them with proper concrete repair materials like BC Repair 100 [
5. Treat all expansion joints with high performance sealants line BC Tec 30S
Open wide groves at the joints and clean them thoroughly to have excellent bonding of Sealants and other accessories , fix backing rods where ever required
- 6.Primer application
The surface is given a complete coat of BCI , high performance epoxy primer @ 200-250 μ
- 7.Polyurea membrane application
8. BC 237 polyurea system is applied as per guidelines from product data sheet@2000 μ
- 9.Work area is back with appropriate filling materials and tiles are re installed



Equipment Introduction

Reactor 2 E-XP2 proportioner is an advanced technology in applying fast-curing polyurea coatings. The Reactor 2 E-XP2 is engineered to process and spray polyurea and other coatings that require high pressures. The hybrid heater and heated hose condition the materials to the right viscosity prior to mixing. Quick knockdown lower pump for easy maintenance, easy-to-use controls, and rugged design make the Reactor the preferred choice for coatings applications.



1. Scope of Work

This method of statement is for Plural component spray application of BC AR polyurea describes the procedures intended to adopt for all associated works with this contract package.

2. Access/Egress

The Access/Egress to the site for the easy movement of workmen, material and equipment will be carried out in a safe manner. Any obstacle shall be properly cleared either manually or employing suitable mechanical equipment. The access to the trenches should be as per project safety procedures.

3. Lighting

3.1 Safety Lighting

Customer will provide Safety lighting at the entry point/s of the project as such adequate to the basic security of the site premises or in accordance with the project requirements.

3.2 Task Lighting

Tower light or portable light is use in the dark or in reduced visibility, lights will be fitted and used to enable the work area to be adequately illuminated. In addition, amber flashing beacons that give warning of the presence of the vehicle will be fitted and used if necessary.

3.3 General

Generally, if otherwise required custom will provide adequate lighting facility wherever there is a necessity for the lighting for the safety of its employees, material, equipment or any other asset of Client.

4. Plant & Equipment

4.1 Plant & Equipment Schedule

Plant and Equipment

<u>Sn</u>	<u>Description</u>	<u>Q t y</u>	<u>Model</u>	<u>Utilization</u>
2.	Graco Reactor, Polyurea Machine	1 2	2 E-XP2	1 year
3.	Heater Hose (240 bar), 15cm with Scuff Guard	2 2	E-XP2, 240	3 years
4.	Whip Hose (240 bar), 3m with Scuff Guard	8	E-XP2, 240	9 months
5.	Fusion Gun AP	1 6	Fusion	7 months
6.	Transfer Pump	2 4	T2 Pump	2 years
7.	Air Supply and Fusion Gun	2 4	Kit for Pumps	4 years

4.2 Personnel Protective Equipment(PPE)

- Safety Helmet
- Clear Goggles
- Black Goggles
- Coverall
- Safety vest
- Safety Shoe
- Hand Gloves
- Face Shield (Where required)

4.3 Manpower

- Foreman/Supervisor
- Site Engineer
- QC
- Plumbers
- Labors (As Required)
- Flagman's (As Required)
- Operators (As Required)
- Masons (As Required)

5. Materials

Surface preparation tools like grinding wheels, cleaning tools

BC Epoxy primer 349

BC AR Polyurea

BC PU top coat

6. Sequence/Method of work:

Delivery of Material using Dyna Truck

- Before any delivery of materials to site, the supervisor with his crew will prepare the area of storage to receive the material at the lay down area. Number of containers, packing size and total quantity, drum condition, labelling and documents etc. shall be verified.
- The supplier shall inform the site at least two (2) days before the delivery date to have sufficient time on securing relevant work permit and gate passes required.
- If the delivery vehicle is from the supplier, it must be checked to ensure that it is conforming to the requirement of the project using the approved vehicle/equipment checklist. Driver of the delivery vehicle must be of complete PPE while he is in the jobsite.
- The delivery vehicle shall be escorted by SUBCONTRACTOR representative from gate to laydown area and vice versa.
- Upon arrival of the material, the driver will hand over the delivery receipt to the warehouse supervisor who will check the document that includes the following:
- .After completion of unloading and material inspection, the materials shall be covered with tarpaulin or blue sheets to protect from exposure to weather.

- The materials delivered have been checked and they are correct as per the approved material submittal

Material Receiving by Manual Handling

- The delivery materials will receive by workforce manually as all of materials are not too heavy.
- Each shipment should be inventoried and inspected upon arrival.
- It is the carrier's responsibility to deliver the shipment in good condition, and it is the receiver's responsibility to ensure that there has been no loss or damage.


7. Program

- Approved schedule will be followed for the duration of project
- Permits from concerned Client authority.
- Wear all necessary protective equipment like safety helmet , hand gloves , cover all and masks etc. before starting any activity including surface preparation Start surface preparation as approved by site in charge
- Degree of surface preparation shall be verified and approved by customer 's representative for the project
- Start the compressor and heat the reactor 70 Dec temperature while developing required application pressure

Surface preparation



Expansion joints treatment

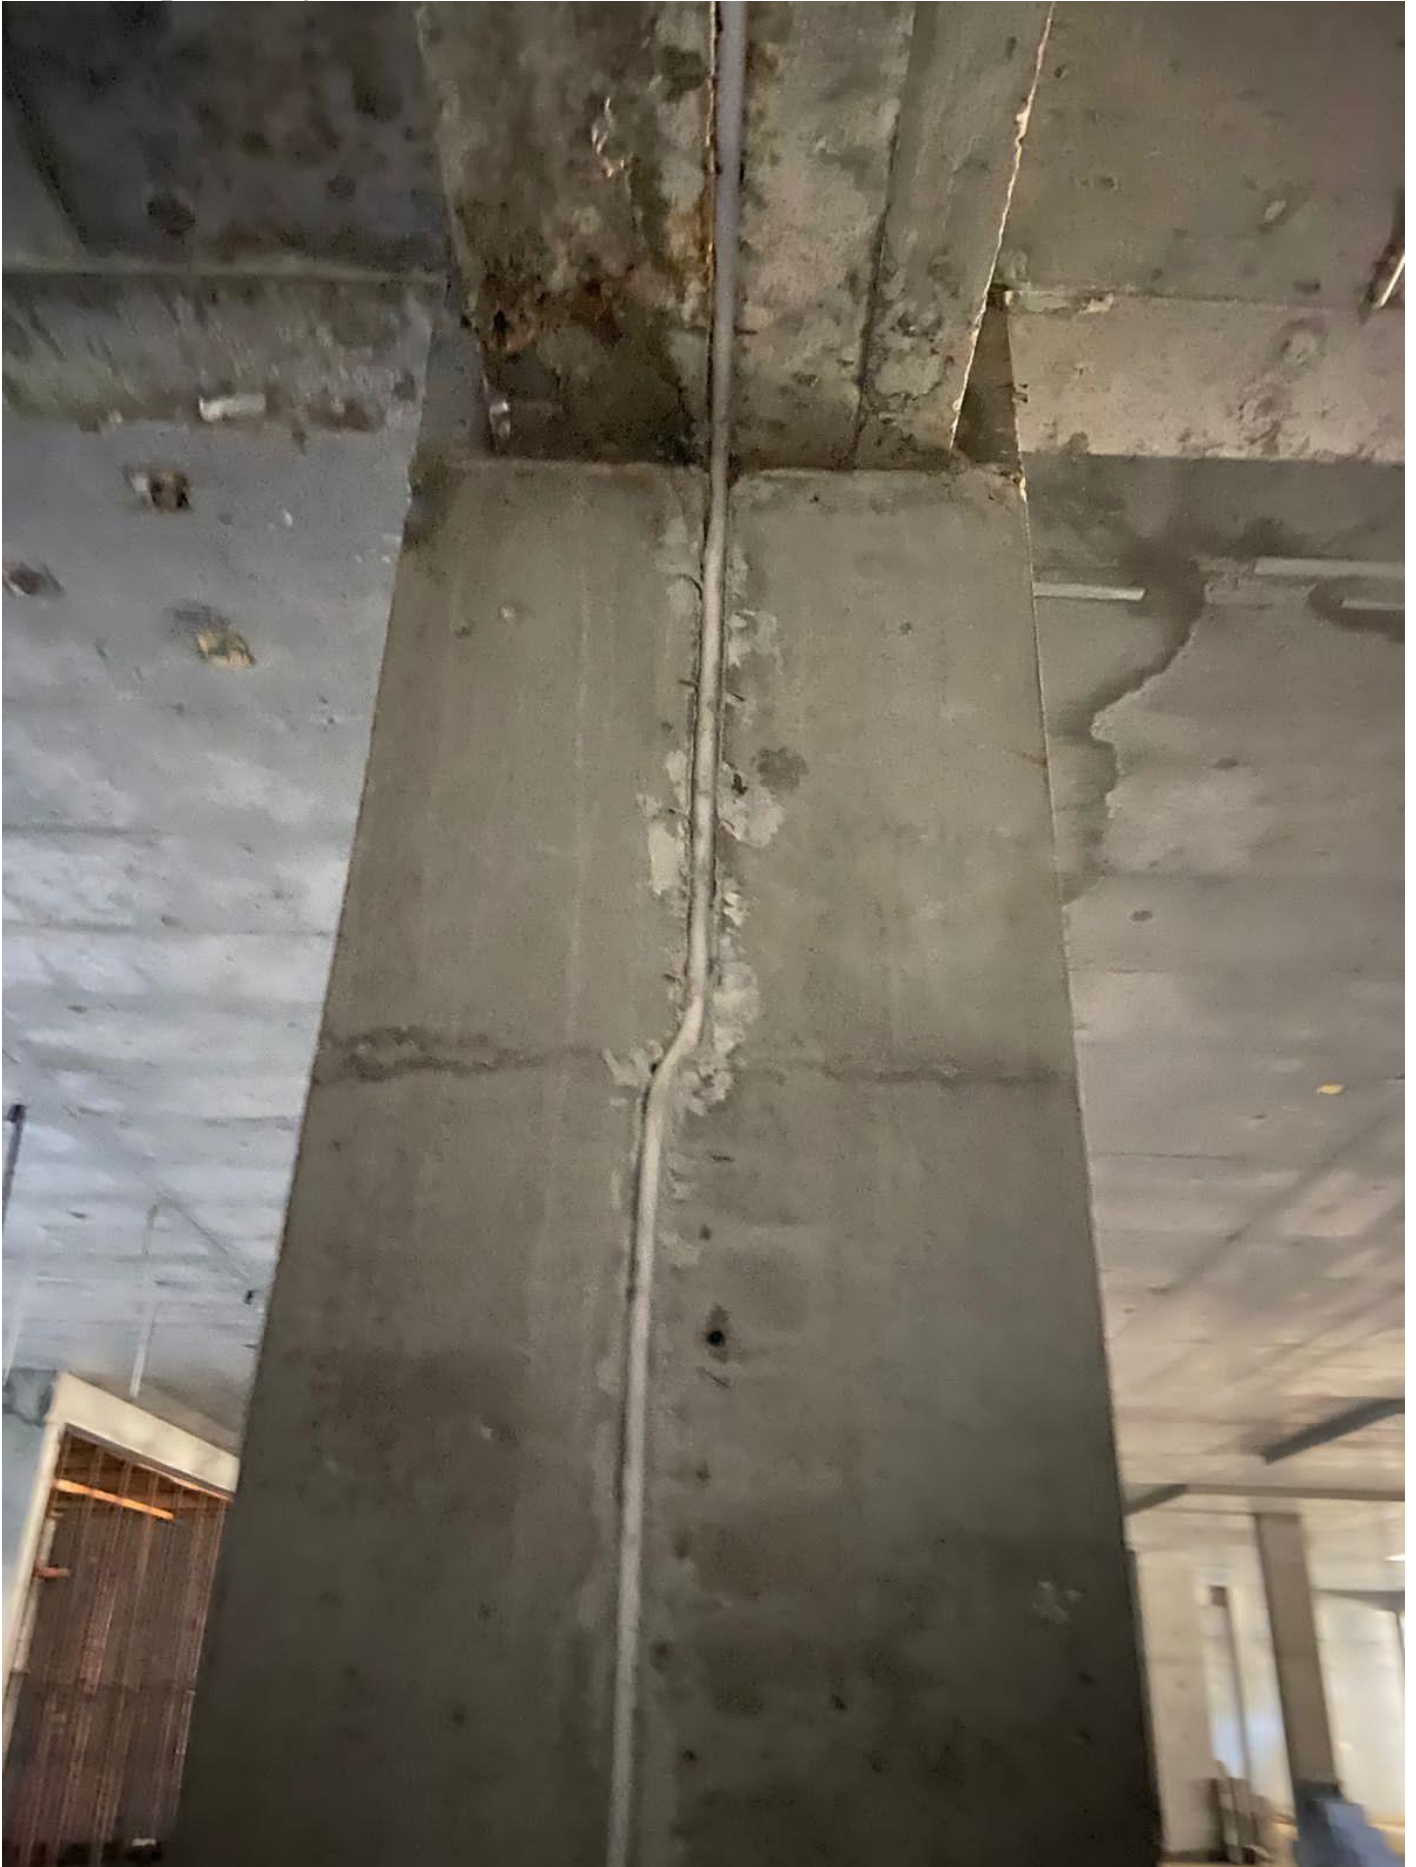

BC Epoxy primer 349



8. Risks and Controls

8.1 Hazards/risks

Risk Assessment (See appendix)

8.2 Control measures/permits

Permit to work shall in place prior to any work issued by Permitauthorizer and must be communicated to workers, operators & staff.

8.3 Third party protection

Obtain third party inspection for equipment and operator if necessary as per Guidelines in Table 1. Plant and Equipment - Training, Licensing, and Certification Requirements.

8.4 Environmental considerations and sustainability

A. Waste Management

- Waste shall be controlled and managed at all times
- Waste shall be transferred by appropriately registered carriers and only removed to licensed sites
- Wastes shall be kept in a secure manner, suitably contained and labeled
- Hazardous wastes shall be kept separately and securely labeled containers for the task and disposed of in accordance with the Hazardous Waste Regulations

BC 237 Application



B. Waste minimization

APC shall endeavor to minimize waste streams in line with the principles of the waste hierarchy

- Avoidance of waste at source
- Reduction of waste volumes
- Re-use of uncontaminated spoil within the works
- Arrange for recycling of the waste
- Disposal as a last option

C. Operations of vehicles and plant

To ensure minimal impact from the operation of vehicles and plant, operators shall give due regard and implement the following

- Minimize route and journey mileage to and from and around site
- Prevent nuisance to the community caused by parking, spoil from vehicle movements, noise and access restrictions
- Ensure prevention of spillage of spoil, fuels, coolants, hydraulic oils and other vehicle fuels
- Maintain vehicles
- Ensure all vehicles and machinery are turned off when not in use
- Ensure suitable control for the means of access and egress to public highway

D. Noise and nuisance

Care shall be taken to ensure good image and relations with the local community by the following

- The use of offensive language, behavior and or discourtesy to the public prohibited
- Excessive noise from plant, equipment, vehicles and employees being monitored
- Strict compliance with noise and working hour restrictions
- Excessive emissions of dust, fumes and odors
- APC will ensure a high standard of housekeeping and litter control on all sites at all times

F. Air Quality

- Any black smoke / unsightly emissions from vehicles and other equipment must be reported.
- Customer shall ensure that smoking is only permitted in designated areas.
- All material stockpiles to be adequately covered to prevent loss of material through wind erosion as well as dust lift.
- Where possible, avoid simultaneous instances of side-by-side material handling to prevent excessive generation of nuisance dust.

8.5 General

Personal Protective Equipment and selection refer to Employer Requirement (AML-DEV-H&S-GLE-0014 Personal Protective Equipment) for minimum requirements for selection, use and maintenance of PPE.

8.6 Communication and Fire Precautions

- Ensure fire extinguishers, type ABC dry chemical, are provided in all active work areas. Units shall be sized and spaced according to work activity occurring, quantities of combustible and flammable materials in the work area, and level of potential for fires.
- Ensure temporary enclosures are equipped with a minimum of one fire extinguisher suitable for all classes of fires that are expected inside the enclosure
- Ensure all permit requirements for hot work activities are followed. Refer to Employer Requirement (AML-DEV-H&S-GLE-0035 Welding, Cutting & Brazing).
- Maintain that combustible debris, rubbish and waste material are removed from buildings at the end of each shift of work. Refer to the Employer Requirement (AML-DEV-H&S-GLE-0013 Housekeeping).
- Ensure that combustible debris, rubbish and waste material are disposed of properly.
- Ensure that adequate and unimpeded means of egress from all parts of the works, is available at all times in case fire.
- Customer shall ensure that smoking is only permitted in designated areas.

9. Training

- All on site must complete site safety induction.

- Toolbox meeting must be conducted prior to commence the activity.
- Provide awareness training for the new employee for (tools, equipment and etc.) and discuss a wide variety of hazards that new workers can encounter while performing different types of tasks, and explains what they need to do to avoid those hazards.
- Working at height training.

10. Supervision

- Works to be supervised by APC site management.
- The Site Supervisor manages and assesses any potential safety hazards on site and looks at eliminating them. Conduct a regular site inspection and provide a safety program.
- Ensure that a project is seen through and completed safely.

11. Supervisor

- To ensure that the approved reparation methodology is well executed by all of the team.
- Safety of the Manpower should always be promoted in all the duration of work daily to avoid any kind of accidents.

A. Foreman

- To ensure the high level of workmanship. To ensure that the preparation methodology adopted by the Supervisor involved is well executed.
- To ensure the availability and the quality of the tools and product use by the team.
- The provision to his responsible Supervisor in charge the adequate information for works performance.
- The provision to his responsible Supervisor the daily report illustrating work progress / reparation methodology applied / resources / manpower / completed work.
- Manage the equipment's in the working zone in a safe way.

B. QC Inspector

- Inspect and conform the quality and test report of the required backfilling materials.
- Witness placement, compaction and compaction test.
- Responsible for random inspection required during the execution
- Responsible for the witness testing approval and records.
- Responsible for arranging third parties required for testing at site whenever needed.

C. Safety Officer

- Ensure that work is performed according to the safety instruction and precautions specified in the work permit.
 - Ensure that barricades and warning tapes are erected where required and safety equipment is readily available at the site.
-

D. Work Permit Receiver

- Submit the activity permit request.
- Must abide by the instructions provided in the activity permit.
- Responsible for obtaining work permits required for the daily job and maintain the record as per project requirements.

12. Working Hours

APC generally have an 8 hour working schedule. However, working hours may be extended by the Project In charge which is paid in accordance with the Saudi labor laws. Usually breaks are considered as per project requirements and Saudi labor laws.

13. Housekeeping

- All rubbish and debris must be cleared from the work site on a daily basis in progress with the work.
- No excess rubbish or debris will be permitted to be left onsite at the end of the working shift.
- Sufficient bins must be available for the Contractor at each work face to cope with debris generated.
- Bins must be emptied/changed immediately when full.

14. Other Information

- Safety induction to be conducted to all new workers that involved to this activity.
- Safety tool box meeting shall be conducted to remind the workers about concerning the safety.
- Make sure that material will be stored at temp storage area and should be barricaded properly.